

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
3 June 2004 (03.06.2004)


PCT

(10) International Publication Number
WO 2004/046004 A1

- (51) International Patent Classification⁷: **B65H 18/10**, 10/02
- (74) Agent: **FORSSÉN & SALOMAA OY**; Eerikinkatu 2, FIN-00100 Helsinki (FI).
- (21) International Application Number:
PCT/FI2003/000853
- (22) International Filing Date:
11 November 2003 (11.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
20022037 15 November 2002 (15.11.2002) FI
- (71) Applicant (for all designated States except US): **METSO PAPER, INC.** [FI/FI]; Fabianinkatu 9 A, FIN-00130 Helsinki (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **HAAPANEN, Jaakko** [FI/FI]; Huvilakatu 16 A 3, FIN-04400 Järvenpää (FI).
- (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: **CORE LOCKING DEVICE**

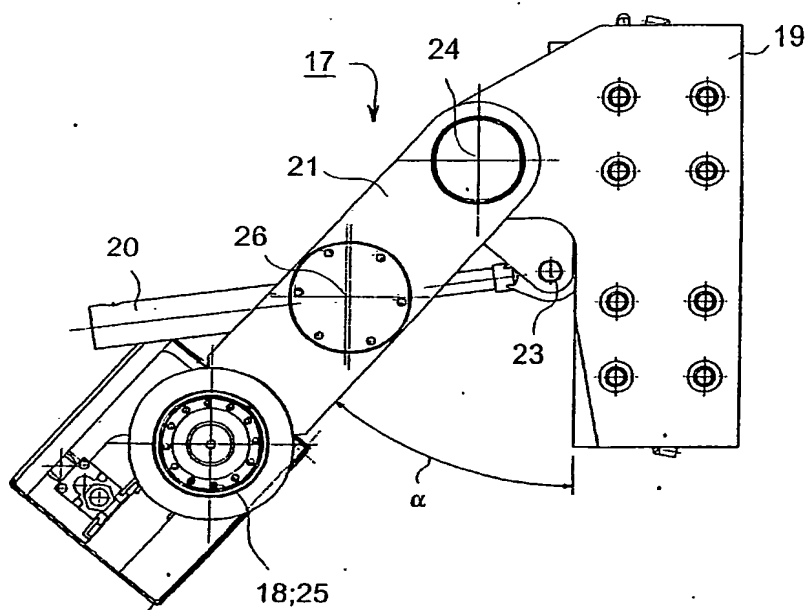

(57) Abstract: The invention relates to a core locking device comprising members (25) for locking the device (17) to a winding core of a roll to be wound on a two-drum winder, advantageously to a core, which device (17) is placed on a slide arranged in connection with the two-drum winder, which locking device (17) moves, as winding progresses, with the centre of the roll being formed along the slide. The device (17) comprises an actuator (20) to produce a counterforce for the force caused by the mass of the core locking device (17) in the changed position of the core locking device (17).